


SS2USBX2-PD 45W A&C Quick Charge and Power Delivery

2 gang 13A Double Pole Switched Socket with 1 USB Type A & 1 USB Type C Outlets

Item Image



Wiring

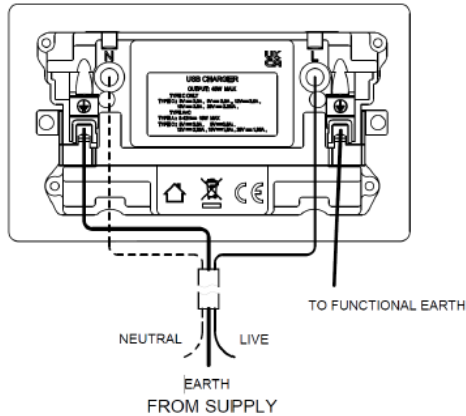

Dimensions

W145mm x H6mm x D25.5mm
awaiting drawing

Insert Dimensions	Double: Height = 86.0mm Width = 145.0mm Depth = 1.5mm plate, 25.5mm Insert	
Terminal Capacity	4x 1.5mm ² / 3x 2.5mm ² /2x 4mm ²	
Supply Voltage	180-250VAC 50/60Hz	
Output USB Type C	5-20VDC 45W MAX	available with type C connected only.
Output USB Type A	5-12VDC 18W MAX	
Maximum Loads Type C only	5V3A , 9V3A , 12V3A , 15V3A , 20V2.25A	
Loads Type A & C	Type A : 5-12V 18W Max; Type C : 5V3A , 9V3A , 12V2.25A , 15V1.8A , 20V1.35A	
Total Combined Load	45W MAX	
Fast Charge Protocol	USB PD(TYPE C ONLY),QC2.0,QC3.0,PE,SCP,FCP,AFC etc.	
Overload Protection	Overload and short circuit protection for input and output	
Recommended Location	Indoors: Dry locations only	
IP Rating	IP2X	
Maximum Altitude	2000m	
Operating Temperature	Minus 5 and up to 40°C	
Applicable Standards	Manufactured to BS1363 BS EN 62368, CE compliant	
	Available in Black or White, Box-Fix or CFX	
All products listed conform to current British or European standard and the product information is correct at the time of going to press.	All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.	It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.
Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.	Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes.	Correct as at 25/02/2022 E&OE

